


GS-50 Solar Module

Quality and Safety

- CE Compliant
- Safety Class II Compliant
- IEC 61646 Compliant
- IEC 61730 Compliant
- Manufactured in ISO9001 Compliant Facilities
- RoHS Compliant

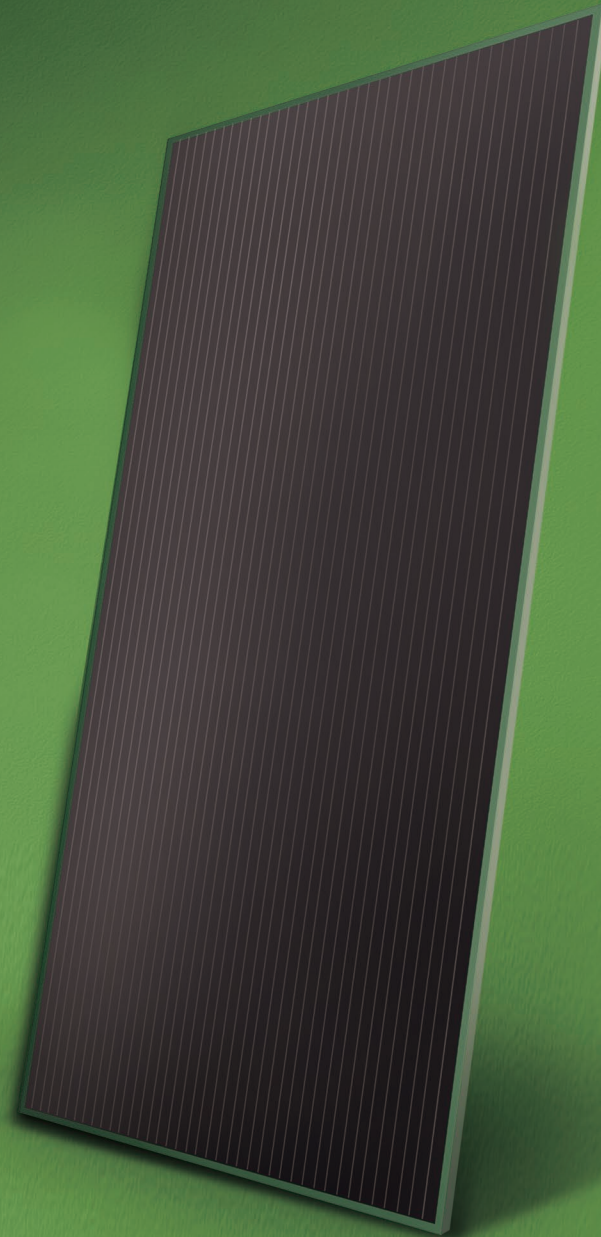

GS-SOLAR COMPANY LIMITED

Head Office: Jiangnan High-tech Electronic Industrial Zone,
Nanhuan Road, Quanzhou, Fujian 362000, China

TEL: +86-595-22412383 FAX: +86-595-22412393

Fujian Factory

Address: Jiangnan High-tech Electronic Industrial Zone,
Nanhuan Road, Quanzhou, Fujian 362000, China

Beijing Factory

Address: No.277 West Mafang Industrial Park,
Pinggu District, Beijing 101204, China

Hongkong Office


Address: 9/F Hutchison House, 10 Harcourt Road,
Central, Hongkong

WEB: www.gs-solar.com E-mail: sales@gs-solar.com



Configuration Characteristics

Module type	GS-50
Cell type	a-Si, double junction
Length	1245mm (49")
Width	635mm (25")
Thickness	7.5mm (0.3")(excluding junction box)
Weight	Approx. 14.4kg (31.7lbs)
Area	0.79m ² (8.5ft ²)
Cordplate	IP67
Front panel	3.2mm (0.13") float glass
Back panel	4.0mm (0.16") float glass
Output cables	400mm (15.7") or 750mm (29.5")
Encapsulant	Anti-water-based polymer

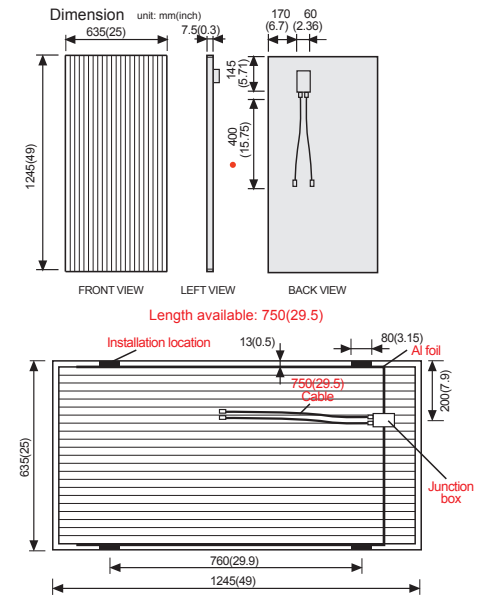

Electrical Characteristics at STC (1000W/m², 25°C, AM1.5)

Module type		GS-50
Maximum system voltage	V _{sys} (V)	1000
Normal power (+/- 5%)	P _{max} (W)	50
Voltage at P _{max}	V _{mp} (V)	43
Current at P _{max}	I _{mp} (A)	1.17
Open circuit voltage	V _{oc} (V)	62
Short circuit current	I _{sc} (A)	1.42
Maximum Source Circuit Fuse	I _{cr} (A)	3

Electrical Characteristics at NOCT (800W/m², 45°C, AM1.5)

Module type		GS-50
Maximum power	P _{max} (W)	35.5
Voltage at P _{max}	V _{mp} (V)	38.6
Current at P _{max}	I _{mp} (A)	0.92
Open circuit voltage	V _{oc} (V)	56.1
Short circuit current	I _{sc} (A)	1.14

Temperature Coefficients

Maximum output power (W)	-0.22% /°C
Open circuit voltage (V)	-0.33% /°C
Short circuit current (A)	+0.09% /°C

The above data represents stabilized electrical module performance at standard test conditions (STC -1000W/m², spectrum AM 1.5, 25°C temperature).

Initial power(W_{ip}) may be approximately 10-18% higher than nominal power(W_p).
25 years performance warranty (90% within 10 years and 80% within 25 years).